


AOC6A06N360XG

4.0 – 6.0 GHz Omni Directional Antenna

COBHAM



The most important thing we build is trust.

The AOC6A06N360XG omni-directional colinear dipole array provides 6 dBi gain on the horizon across the 4 - 6 GHz band. The vertical linear polarization pattern provides a null on boresight and a maximum gain on the horizon, making it suitable for longer range horizontal paths. Because it is omni-directional, no azimuth adjustment is required to maintain its specified gain. This antenna is designed for airborne and ground applications.



Specifications:

GMS PN:	AOC6A06N360XG
Frequency:	4.0 – 6.0 GHz
Gain:	6 dBi nominal
HPBW:	30° nominal
Polarity:	Linear, Vertical
VSWR:	< 1.7:1
Power:	40 Watts
Weight:	7 oz
Connector:	N (f)
Rating:	Airborne
Construction:	G10 Rad / Alum base
Finish:	Polyurethane white
Mount:	4 x #10 on 2.375" cir

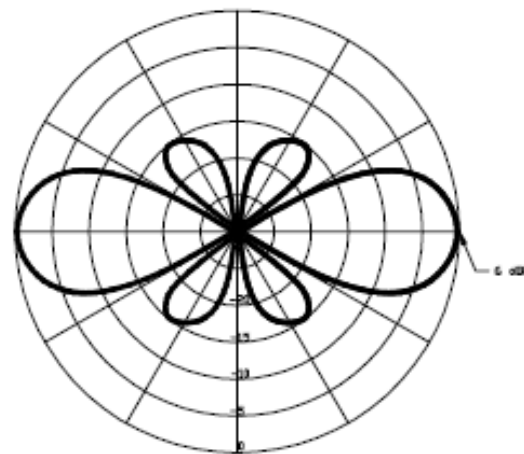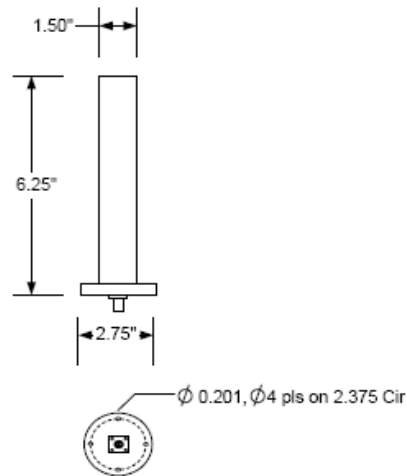

ELEVATION PATTERN

Specifications subject to change without prior notice
Typical values shown unless min or max is specified
100-DS0088X1A 03/16/09 1 of 1

1916 Palomar Oaks Way, Suite 100 Carlsbad, CA 92008
Tel. (760) 496-0055 gms-sales@cobham.com
Fax. (760) 496-0057 GMS PRODUCTS